




CE EN 14439
(C/25)

R (m)	⌋						⌋								
80	23,6	25	30	34	37	42,0	43,9	50	54	60	64	70	74	80	m
	12000	11215	9045	7785	7025	6000	6000	5185	4750	4210	3905	3515	3295	3000	kg
74		25,7	30	34	37	40	45,4	48,4	54	60	64	70	74	m	
		12000	10000	8620	7790	7085	6000	6000	5310	4710	4375	3945	3700	kg	
70			31,0	34	37	40	44	50	54,4	59,5	64	70	m		
			12000	10765	9755	8900	7945	6810	6000	6000	5530	5000	kg		
64			31,1	34	37	40	44	50	55,7	60,2	64	m			
			12000	10835	9820	8960	8000	6855	6000	6000	5600	kg			
60			32,2	34	37	40	44	50	57,6	60	m				
			12000	11265	10215	9330	8340	7155	6000	6000	kg				
54			31,7	34	37	40	44	50	54	m					
			12000	11085	10050	9175	8200	7035	6500	kg					
50			33,4	34	37	40	44	50	m						
			12000	11750	10660	9740	8710	7600	kg						
40				35,0	37	40	m								
				12000	11270	10500	kg								



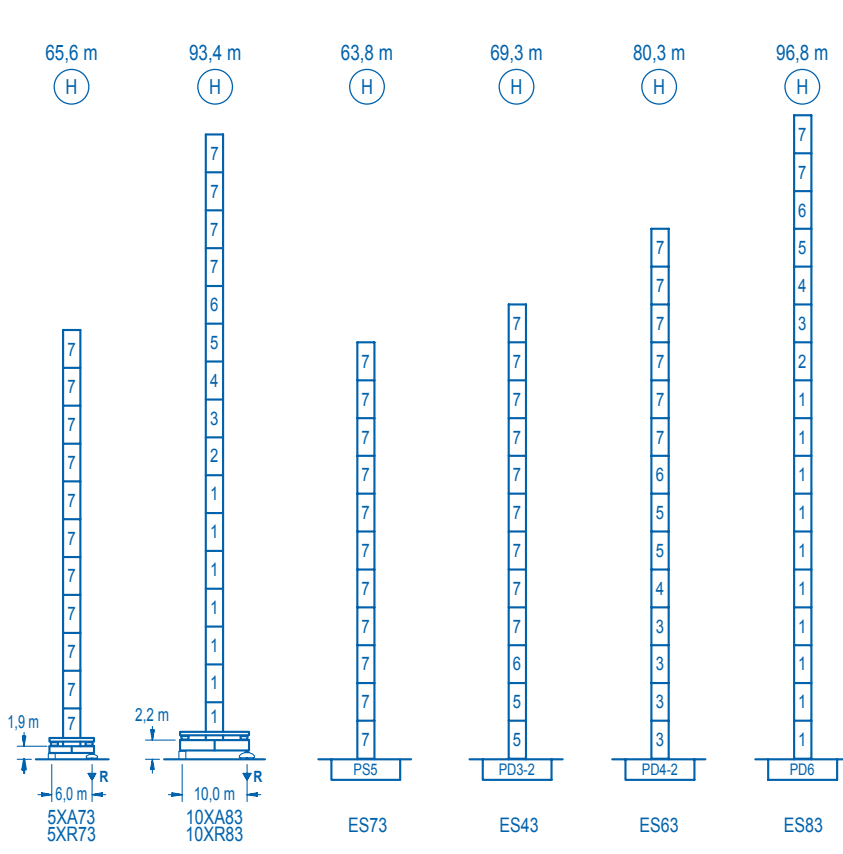

nº	Ref.	h	h
1	D36	2,5	5,5
2	TD36A	2,5	5,5
3	D34	2,5	5,5
4	TD34	2,5	5,5
5	D33	2,5	5,5
6	TD33A	2,5	5,5
7	S35	2,5	5,5
8	D23	2,0	5,5
9	D23A	2,0	5,5
10	CLD23A	2,0	3,1

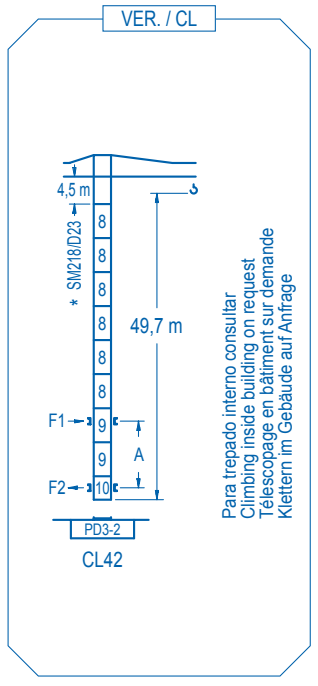

R. máx.	En servicio In operation En service In Betrieb	5XR73.....126,8 t 10XR83.....124,4 t	R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	5XR73.....114,7 t 10XR83.....211,4 t

Para otras zonas de viento o alturas superiores consultar
For other wind zones or additional hook heights on request
Pour d'autres zones de vent ou des hauteurs supplémentaires sur demande
Für andere Windzonen oder weiteren Hakenhöhen auf Anfrage

	5XA73		10XA83	
A max	51,4		79,2	
B max	-	33,0	-	33,0
C max	47,2	47,2	47,2	47,2
H max	98,6	131,6	126,4	159,4

	ES73	ES43	ES63	ES83
A max	49,6	55,1	66,1	82,6
B max	-	33,0	-	33,0
C max	47,2	47,2	47,2	47,2
H max	96,8	129,8	102,3	135,3

CFU-7.5
7,5 kW
0 ⇄ 94 m/min

GR-12
4 x 120 Nm
0 ⇄ 0,7 rpm

TRA-7.5 **TRA-10**
2 x 75 Nm 2 x 100 Nm
0 ⇄ 20 m/min
5XR73 10XR83

TRA-7.5VC **TRA-10VC**
2 x 75 Nm 2 x 100 Nm
0 ⇄ 20 m/min
5XR73 10XR83

EFU2-37-30
385 m
37 kW
t ↑
m/min → 34 40 60 80
2,2
t ↑
m/min → 17 20 30 40
4,4

EFU4-45-30
545 m
45 kW
t ↑
m/min → 38 80 120 160
1,2
t ↑
m/min → 19 40 60 80
2,4

EFU4-65-30
790 m
65 kW
t ↑
m/min → 53 80 120 160 200 224
1,2
t ↑
m/min → 27 40 60 80 100 112
2,4

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
--	------------------------

Opcional Optional En option Kaufoption	*
---	---



Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com

Polígono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN

DS.0948.10	11/09	21 LC 400 12 t
------------	-------	----------------