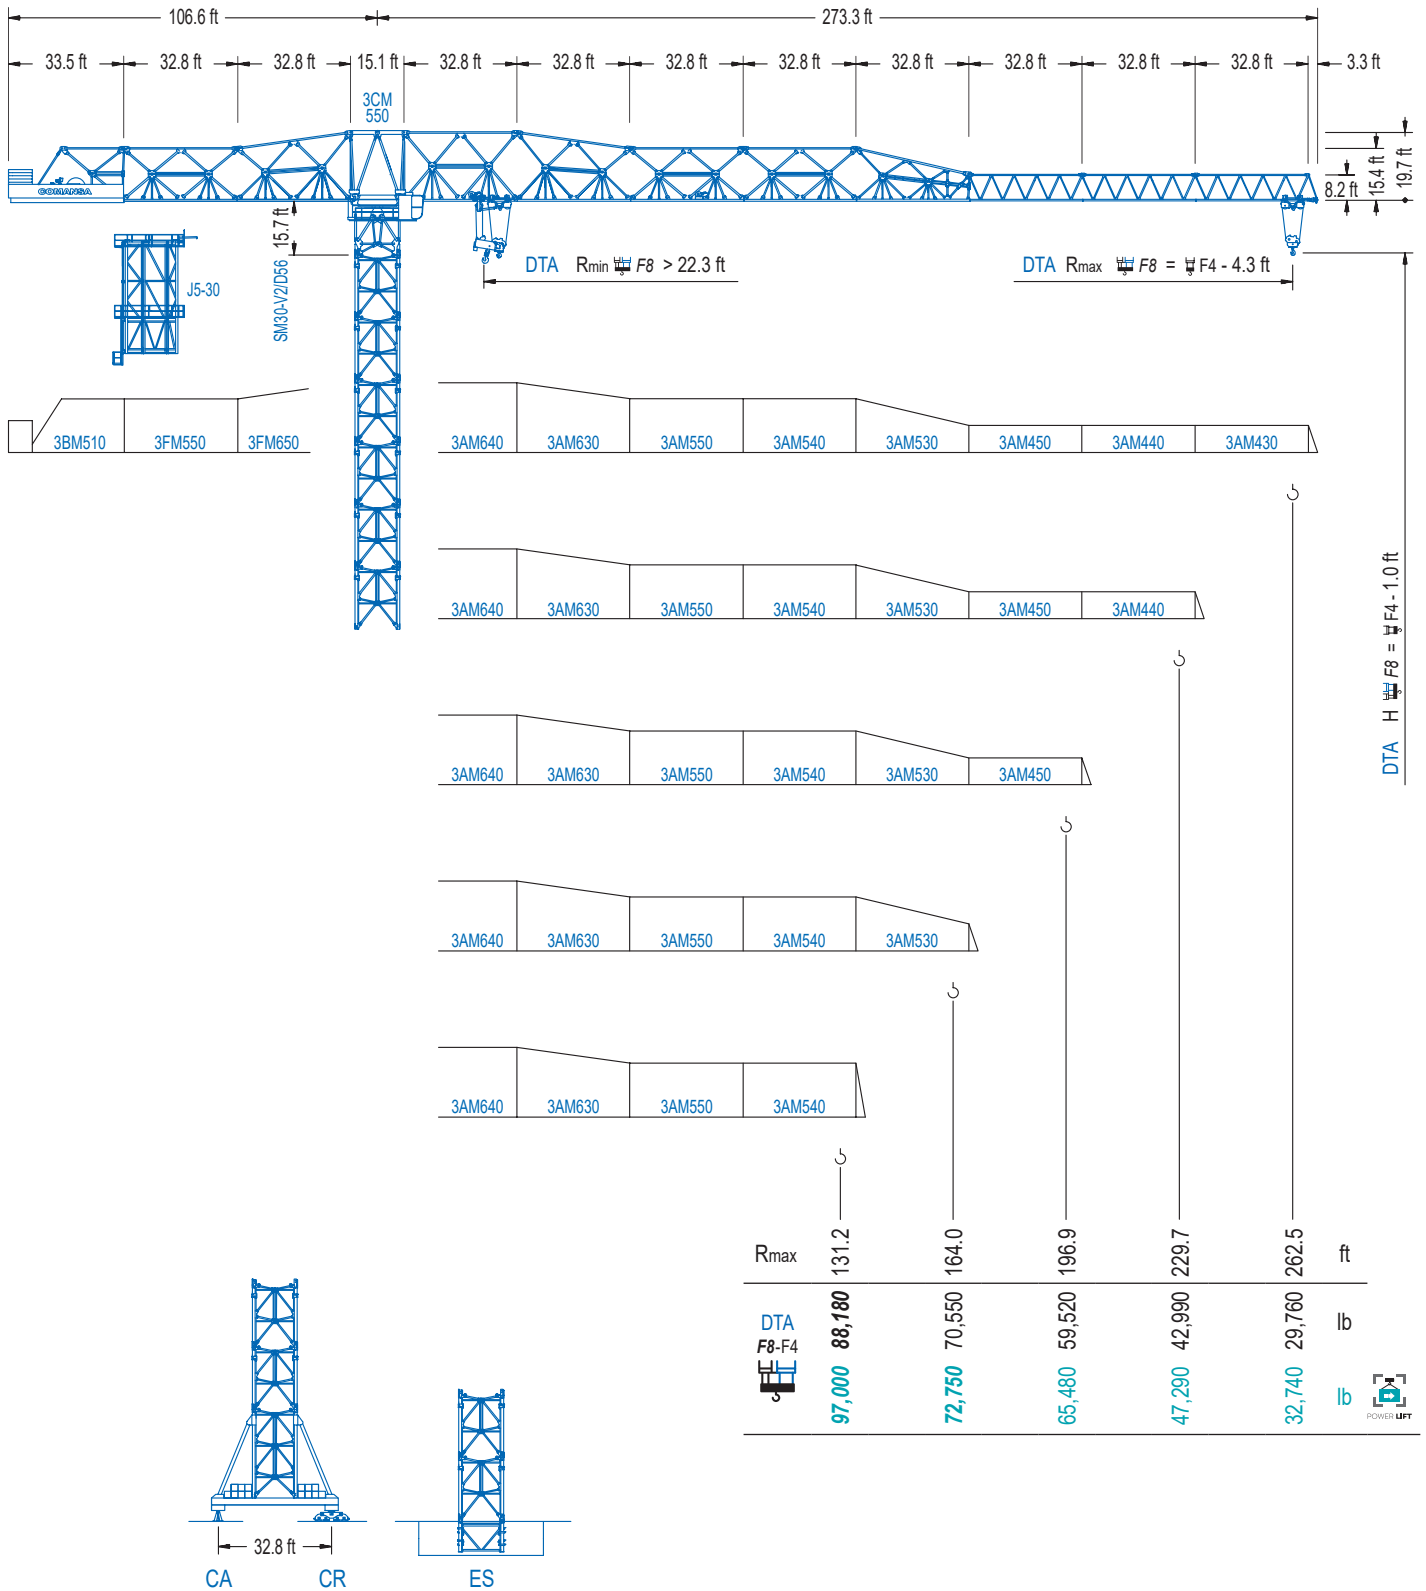


**COMANSA****3000 Series****30LC1450****141,090 lb****3000 Series**

DTA Doble Carro SR/DR Automático. / Double Trolley Automatic SR/DR. / Double Chariot SM/DM Automatique. / Doppel Katze mit automatischer Umschierung. / Carrello doppio SR/DR automatico. / Автоматическое переключение на двоянную каретку.

CE EN 14439**DS.1441.06.IA**

01/23


30LC1450 141,090 lb

DIAGRAMA DE CARGAS

Load chart / Diagramme de charges / Lastdiagramm / Diagramma di carico / Диаграмма распределения нагрузки

DTA


R	141,090 lb F8	70,550 lb F4	65.6	82.0	98.4	114.8	127.0	131.2	147.6	159.8	164.0	180.4	196.9	213.3	229.7	246.1	262.5	↔ (ft) ↕ (lb)
262.5	67.3 70.9	117.8 127.6 124.7 137.5	141,090	110,630	88,360	72,820	70,550	68,340	59,610	54,340	52,690	47,070	42,420	38,490	35,160	32,280	29,760	
229.7	77.8 83.0	137.5 150.3 146.7 162.7	141,090	132,610	106,420	88,160	77,820	74,690	70,550	65,740	63,780	57,100	51,590	46,960	42,990			
192.6	86.9 93.2	153.9 169.6 165.4 184.4	141,090	121,760	101,170	89,550	85,980	74,340	70,550	70,550	65,790	59,520						
164.0	86.0 92.5	151.9 164.0 159.8	141,090	119,800	99,520	88,050	84,550	73,060	70,550	70,550								
131.2	86.0 92.8	127.0 127.0	141,090	119,970	99,670	88,180												

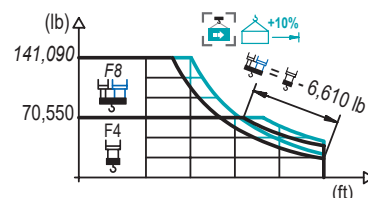

Datos válidos hasta 328 ft de ABG. Para alturas mayores consultar / Valid data up to 328 ft HUH. Additional heights on request / Données valables jusqu'à 328 ft HSC. Pour des autres hauteurs, merci de nous consulter / Gültige Daten bis zu 328 ft HH. Bei höheren Hakenhöhen nachfragen / Dati validi fino a 328 ft ASG. Per altezze superiori consultare Comansa / Допустимые данные до 328 фут ВПК. Для более высоких высот консультируйтесь

MECANISMOS

Mechanisms / Mécanismes / Antriebe / Meccanismi / Механизмы

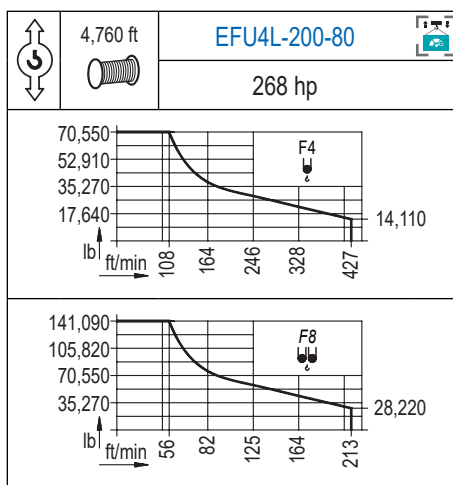

	CFU-18
	24 hp
0	↔ 295 ft/min


	GFU-15
	4x 20 hp
0	↔ 0.7 rpm

	TRA-12
	4x 88 ft·lb
	78 ft/min
	10CR85

Elevación / Hoist / Levage / Hub Sollevamento / Тип механизма (подъем)	Carro / Trolley / Chariot / Laufkatze / Carrelo / Грузовая тележка	Giro / Slewing / Rotation / Drehbewegung / Rotazione / Поворот	Traslación / Travel / Translation / Verfahrbewegung / Traslazione / Ход	Tensión de alimentación / Operating voltage / Tension de service / Betriebsspannung / Tensione di alimentazione / Напряжение источника питания	Potencia requerida / Required power / Puissance requise / Benötigte Leistung / Potenza richiesta / требуемая мощность
EFU4L-200-80	CFU-18	(4x) GFU-15	(4x) TRA-12	480 V 3 ph 60 Hz	262 kW

Optional /
Optional / En
option / Kaufoption
/ Opzionale /
Опционально

*

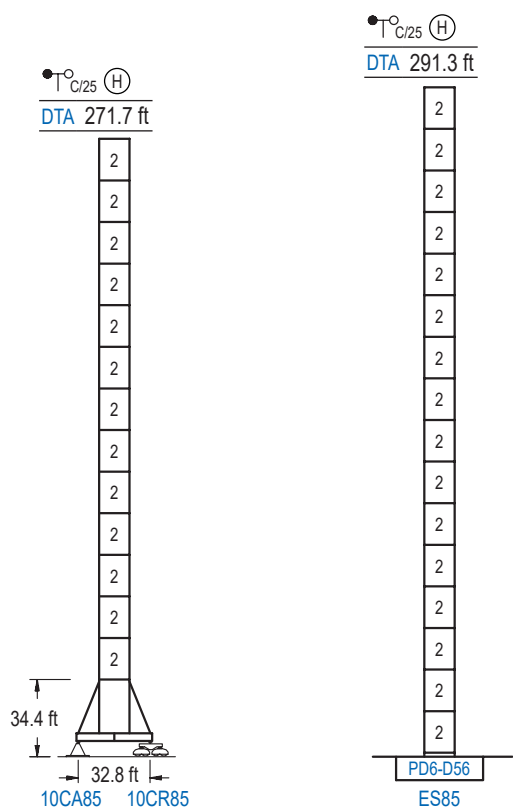


	nº	Ref.	$\square$	h
	2	D56	13.1	18.0

GRÚA ARRIOSTRADA

Braced crane / Grue à entretoisement / Abgespannter Kran / Gru ancorata / Наращиваемый кран

Ø 13.1 ft



		10CA85	
A max		214.9	
A min		124.7	
B max		-	162.4
B min			90.2
C max		219.2	219.2
H max		434.1	596.5

		ES85	
A max		234.6	
A min		126.3	
B max		-	162.4
B min			90.2
C max		219.2	219.2
H max		453.7	616.1

Otras zonas de viento o alturas superiores consultar / Other wind zones or additional hook heights on request / Autres zones de vent ou des hauteurs supplémentaires sur demande / Andere Windzonen oder weitere Hakenhöhen auf Anfrage / Per zone con velocità del vento particolari o altezze superiori consultare il fabbricante / При других ветренных зонах о при большой высоте проконсультируйтесь с нами

